BioCube 29 Fish Saver

INSTRUCTIONS AND TROUBLESHOOTING

The BC29FS was designed to keep livestock from finding their way in the rear chambers. Simple drop in design is easy to install. Place in the rear chamber area with the hood lifted so that the guard leans towards the rear of the tank. Put the hood back on the tank. Open the access lid and move the fish saver forward towards the light splash guard. The top piece on the saver will butt up against the splash guard just under a small lip. To remove, just reverse this process. A stay hold piece is included. Place it over the chamber two/three wall. It helps to put the fish saver on first then the stay hold.
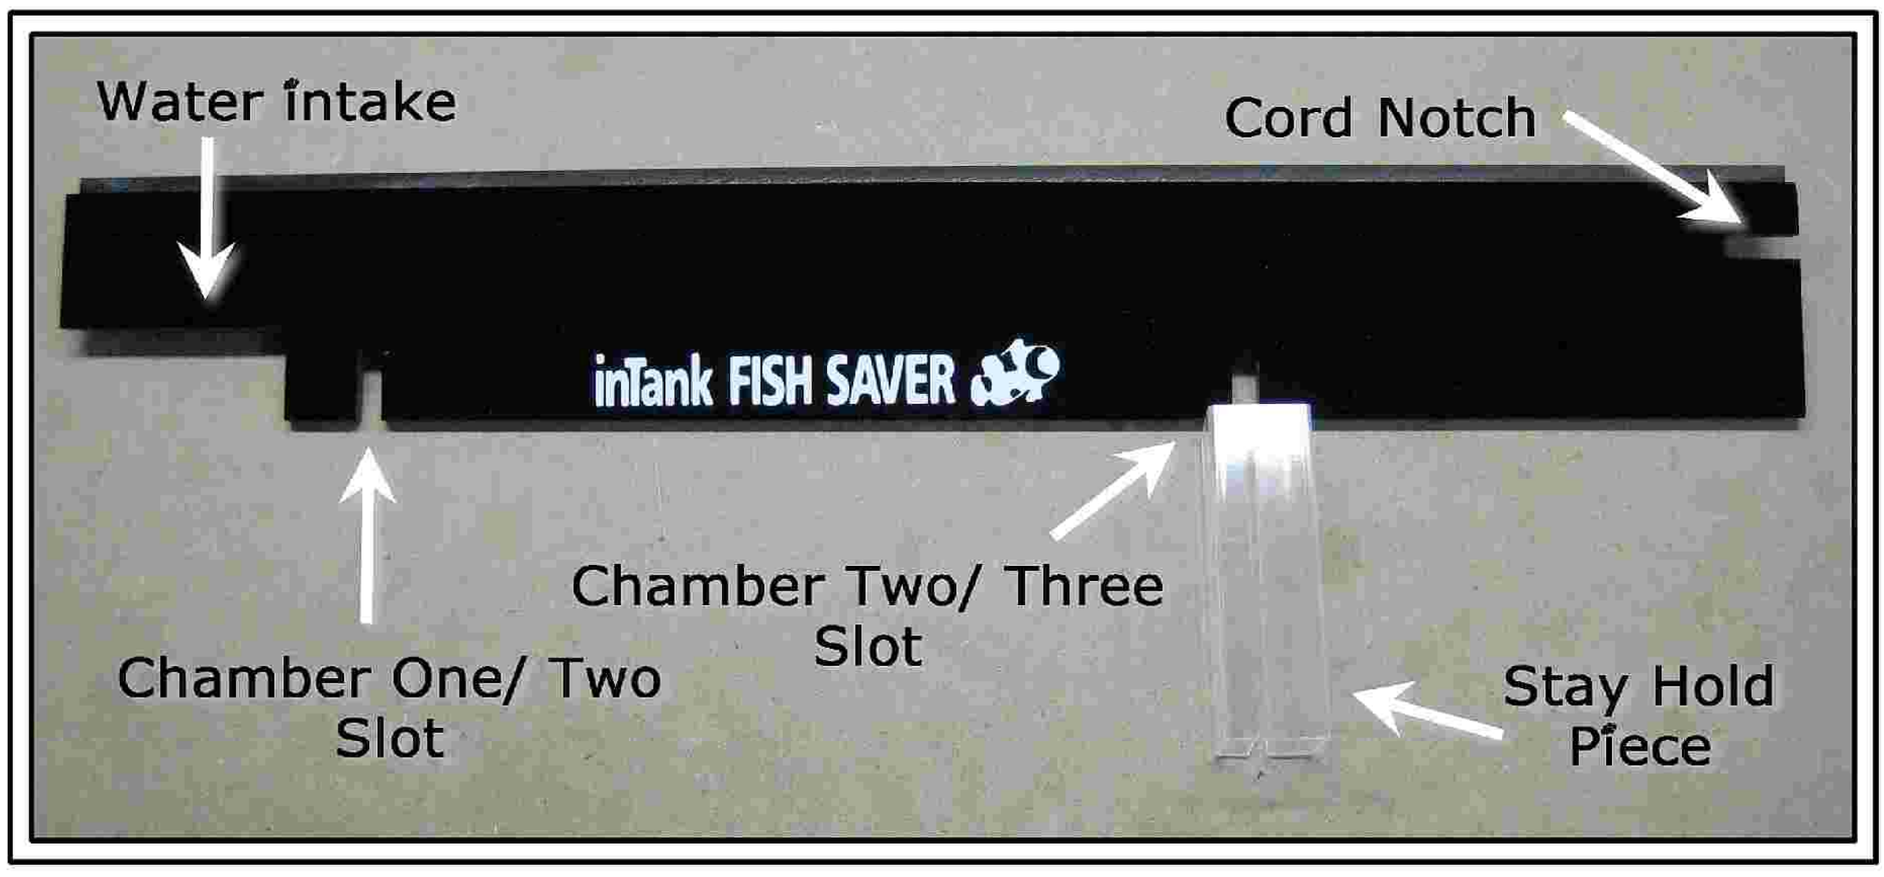
There is a notch cut out to route a cord for a possible pump or other piece of equipment inside the display. A cord will fit through the gap between the saver and the tank on the intake side, a cord notch is not needed. See picture for further instruction.